

THE TOTAL ECLIPSE • Commercial Grade



Many deck or porch awnings don't give you complete coverage, leaving some parts of your deck exposed to the sun. The Total Eclipse is the perfect awning if you have a large outdoor living space. With its extra long projection, it's ideal for commercial use too. The Total Eclipse retractable awning is the best way to maximize your protection from the sun and the heat.

- Awning Widths up to 40' (Ships up to 26' in one piece)
- Awning Projections of 14'9" and 16'6"
- Heavy Duty, Commercial Grade
- Optional Protective Hood

- \blacksquare Motorized, with a full line of electronic enhancements by SOMFy.
- Heavy duty 50mm x 50mm torsion bar for increased unit rigidity
- Platinum Protection extended warranty coverage included
- Frame available in White, Camel. and Spartan bronze.
- Choose from more than 150 long lasting, fade resistant solution dyed acrylic Subrella' fabrics to best match your unique décor and style

PRODUCT DETAILS AND TECHNICAL SPECS

INCLUDED:

AVAILABLE:



Fabric: 10 Years*


Motor/Electronics: 8 Years*

*To the original purchaser

PLATINUM


PROTECTION

Includes lifetime on fabric, motor, and electronics*

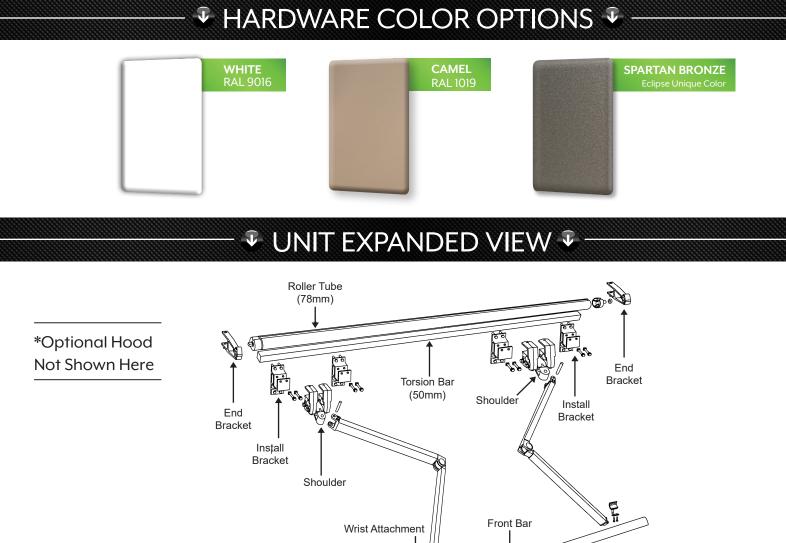


MINIMUM PITCH REQUIREMENTS 🖲


0




J



↓ UNIT PROFILE VIEWS ↓ ·

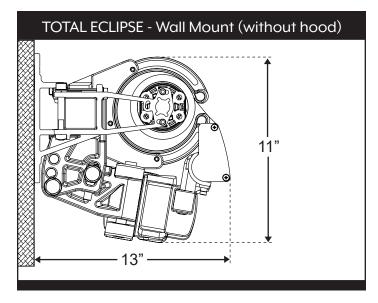


TOTAL ECLIPSE - Soffit Mount (no hood option available)




TOTAL ECLIPSE


TOTAL ECLIPSE - Wall Mount (with hood)

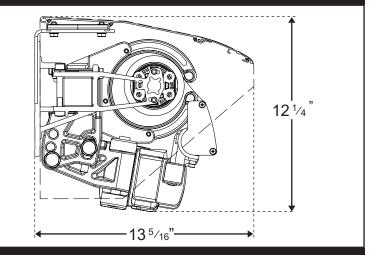


TOTAL ECLIPSE - Roof Mount (with 12" roof brackets & hood)

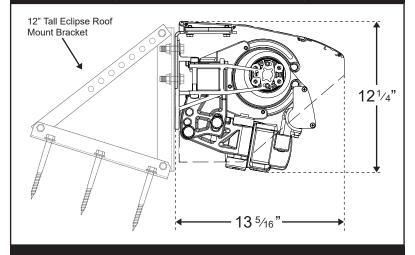

BRACKET DETAILS





50 X 50mm WALL/SOFFIT BRACKET *Must use a header board

for this install bracket



✤ INSTALLATION RESOURCES

2 arms

Total Eclipse: 14-9 Projection

Total Eclipse: 16-6 Projection

3 arms

2 arms	3 arn	ns 4 arı		ns		
		Install	Bracket	Hood	Bracket	Center Support
Unit Width		Count		Hood Bracket Count		Count
up to 20'0"		4		4		N/A
20'0"1/8 to 20'11"7/8		5		4		1
21'0" to 21'11"7/8		7		5		1
22'0" to 22'11"7/8		7		5		1
23'0" to 23'11"7/8		7		5		2
24'0" to 24'11"7/8		7		5		2
25'0" to 25'11"7/8		7		5		2
26'0" to 26'11"7/8		7		6		2
27'0" to 27'11"7/8		7		6		2
28'0" to 28'11"7/8		7		6		2
29'0" to 29'11"7/8		7		6		2
30'0" to 30'11"7/8		7		6		2
31'0" to 31'11"7/8		7		7		2
32'0" to 32'11"7/8		7		7		2
33'0" to 33'11"7/8		7		7		2
34'0" to 34'11"7/8		9		7		2
35'0" to 35'11"7/8		9		7		2
36'0" to 36'11"7/8		9			8	2
37'0" to 37'11"7/8		11			8	3
38'0" to 38'1	1"7/8		11		8	3
39'0" to 39'11"7/8		11			8	3
40'0"+			11		8	3
Product Notes:						10" to 00'11-10"
First center support starts at 20-0 1/8				2 arms: 16'51/2" to 28'117/8" 3 arms: 29'0" to 38'117/8"		
Second center support starts at 22-10 1/8				4 arms: 39'0" to 40'0"		
Third center support starts at 37-0 1/4 4 arms: 39 0° to 40 0						to 40 0

Unit Width	Install Bracket Count	Hood Bracket Count	Center Support Count				
up to 20'0"	4	4	N/A				
20'0"1/8 to 20'11"7/8	5	4	1				
21'0" to 21'11"7/8	5	5	1				
22'0" to 22'11"7/8	7	5	1				
23'0" to 23'11"7/8	7	5	2				
24'0" to 24'11"7/8	7	5	2				
25'0" to 25'11"7/8	7	5	2				
26'0" to 26'11"7/8	7	6	2				
27'0" to 27'11"7/8	7	6	2				
28'0" to 28'11"7/8	7	6	2				
29'0" to 29'11"7/8	7	6	2				
30'0" to 30'11"7/8	7	6	2				
31'0" to 31'11"7/8	9	7	2				
32'0" to 32'11"7/8	9	7	2				
33'0" to 33'11"7/8	9	7	2				
34'0" to 34'11"7/8	9	7	2				
35'0" to 35'11"7/8	9	7	2				
36'0" to 36'11"7/8	13	8	2				
37'0" to 37'11"7/8	13	8	3				
38'0" to 38'11"7/8	13	8	3				
39'0" to 39'11"7/8	13	8	3				
40'0"+	13	8	3				
Product Notes: First center support starts at 2 Second center support starts Third center support starts at	at 22-10 1/8	2 arms: 18'11/2" to 30'117/8" 3 arms: 31'0" to 40'0" 4 arms: N/A					

4 arms - NONE

Image: Image

MOUNTING & FABRIC PROTECTION > The Total Eclipse can be ordered One of Three ways:

OPEN ROLLER

Fully exposed rolled up fabric referred to as an "Open Roller", is typically used for soffit mounting or when overhead protection is provided just above the unit.



2. PROTECTIVE HOOD

With a 14 1/4" deep protective hood for wall mounting when no overhead protection is present. The hood adds 1" to the overall unit length.



3. ROOF MOUNT

When additional clearance is required, we recommend the protective hood in combination with our strong and sturdy 12" tall roof mount brackets.



TOTAL ECLIPSE

V7.20

